



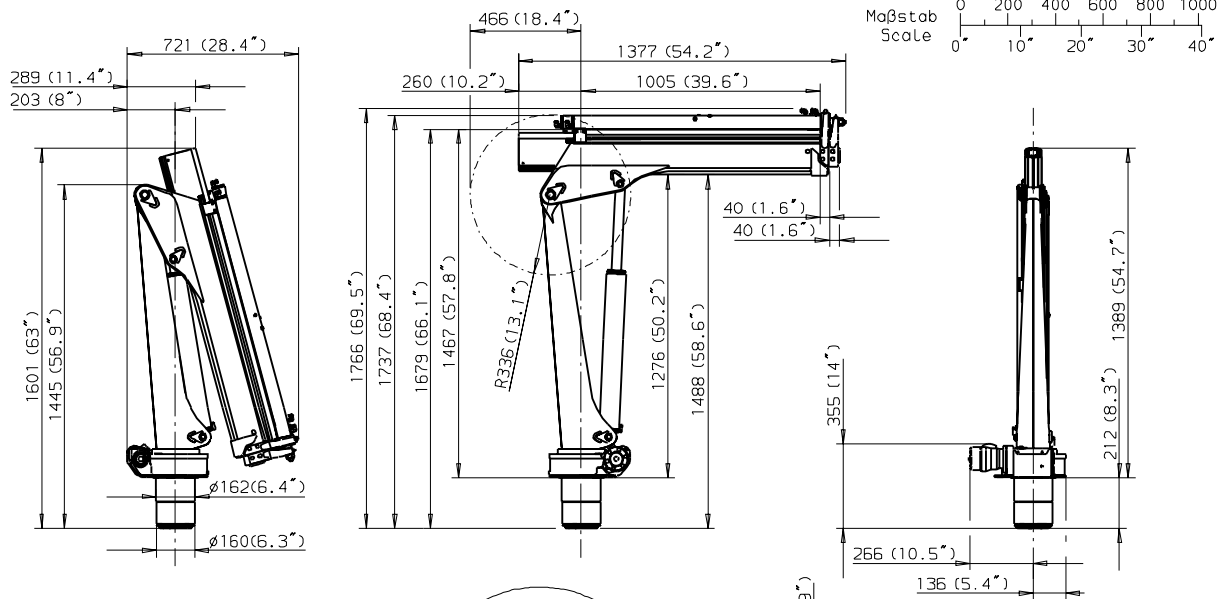


BS253

Abstützung manuell
Stabilizer manual
Stabilisateur manuel

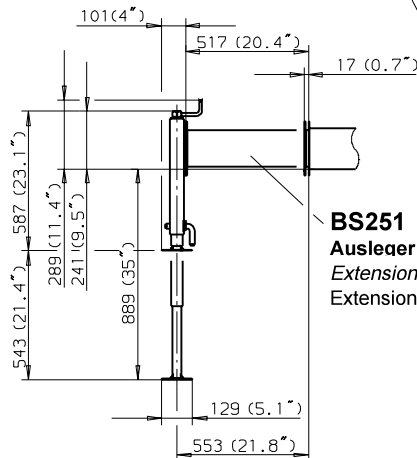


BS251

Ausleger (auf Wunsch)
Extension box (available on request)
Extension stab. (selon vos desirés)

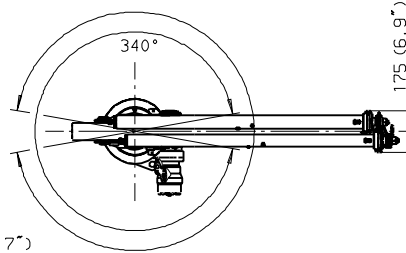

BS378

Abstützung hydraulisch
Hydraulic stabilizer
Stabilisateur hydraulique



TECHNISCHE DATEN – SPECIFICATIONS – DONNEES TECHNIQUES

Lastmoment <i>Lifting moment</i> Couple resistant	23.2kNm (2.37mt. 17137ft.lbs.)
Schwenkmoment <i>Slewing torque</i> Couple pivotant	3.2kNm (0.33mt. 2386ft.lbs.)
Schwenkbereich <i>Slewing range</i> Angle pivotant	340 °
Betriebsdruck <i>Operating pressure</i> Pression de service	25MPa (250 bar. 3625 psi)
Empfohlene Fördermenge der Pumpe <i>Recomm. pump capacity</i> Refoulem. conseillée pour la pompe	12 l (2.6 imp. gall.)
Eigenengewicht Standardkran <i>Dead weight – standard crane</i> Poids mort – grue standard	1.72kN (175ka. 386lbs)

Konstruktionsänderungen vorbehalten, fertigungstechn. Toleranzen müssen berücksichtigt werden.
Subject to change, production tolerances have to be taken into account.
Les tolérances relatives à la technique de production doivent être prises en considération.

BS379

Schwenkstütze
Slewing stabilizer
Stabilisateur pivotant

